



## 向往背景音乐驱动说明书

设备配置


### 设备连接

直接将播放主机连接入网络即可

### Composer 软件配置


查找并添加驱动

在驱动库中，在搜索栏中输入Deocean HOPE MediaPlayer，双击添加如下图的驱动：

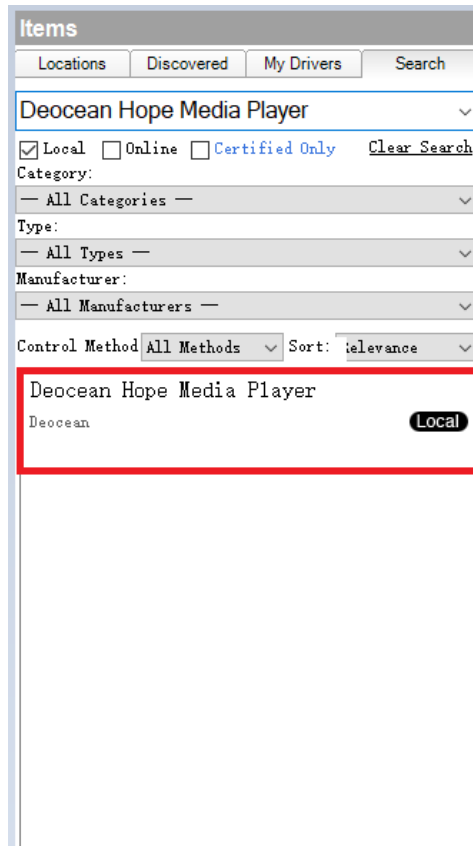

## 驱动激活


Deocean HOPE MediaPlayer 驱动初始的激活状态为未授权（Unregistered）。将相应的授权码复制到驱动的 Activation Key 栏中，按“set”键，成功激活后状态为已激活（Activated）：

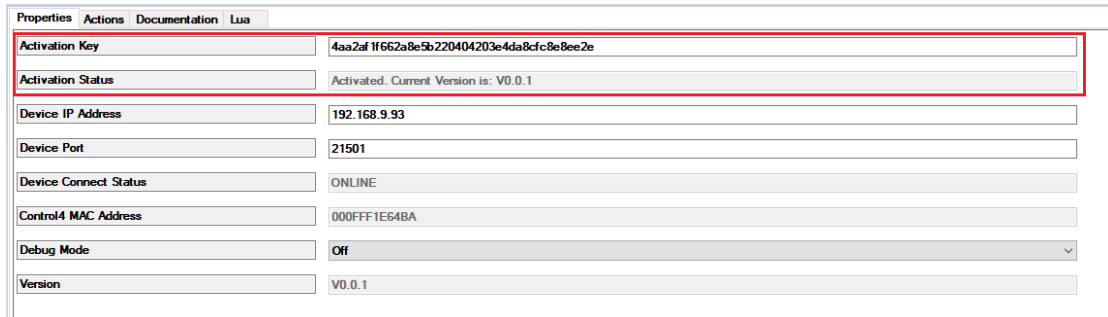

## 连接配置


首先要打开设备的 HopeHalo 对接服务，开启方法：点击音乐播放器的右下角设置图标，在加载界面中选择 应用服务-应用服务选项，点击 HopeHalo 对接服务（如未安装请安装，已安装请确认开启）

在Deocean HOPE MediaPlayer驱动的Connection->中做如下链接即可。

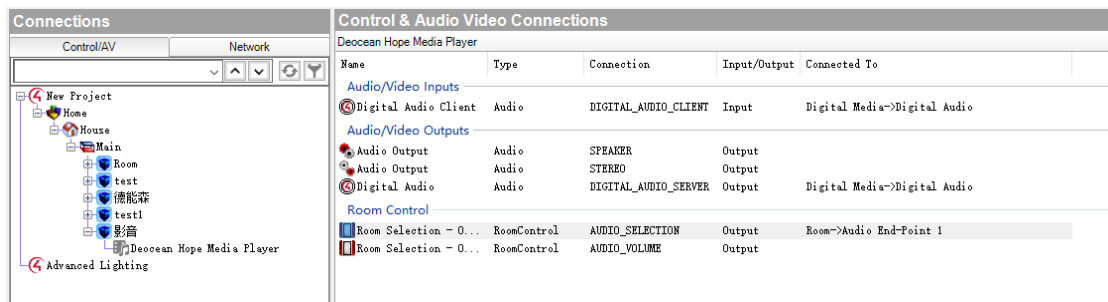


## 网络连接方法

在 Actions 中点击搜寻设备并连接

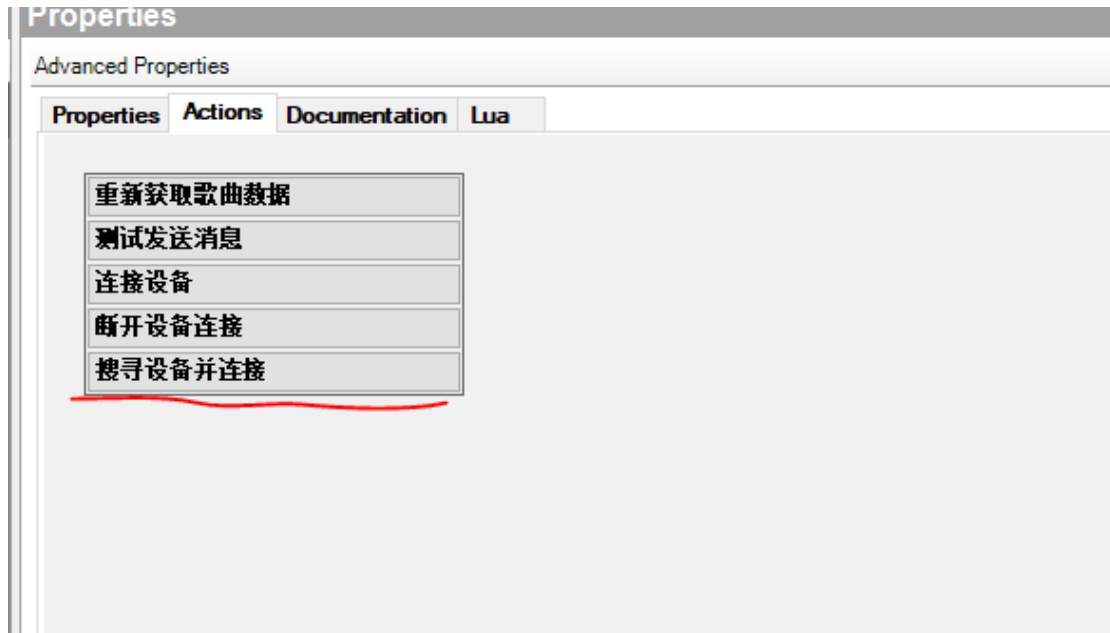


当 Device Connect Status 的值为 ONLINE 时表示连接成功，Device IP Address 与 Device Port 会自动填充。如果连接失败，请手动输入 Device IP Address 与 Device Port（默认值为 21501）的值，并点击上图中的连接设备。


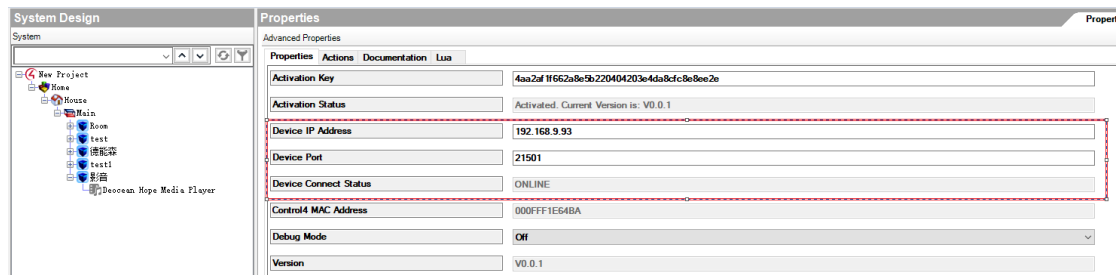


## 编程方法

下拉框中可以选则触发事件

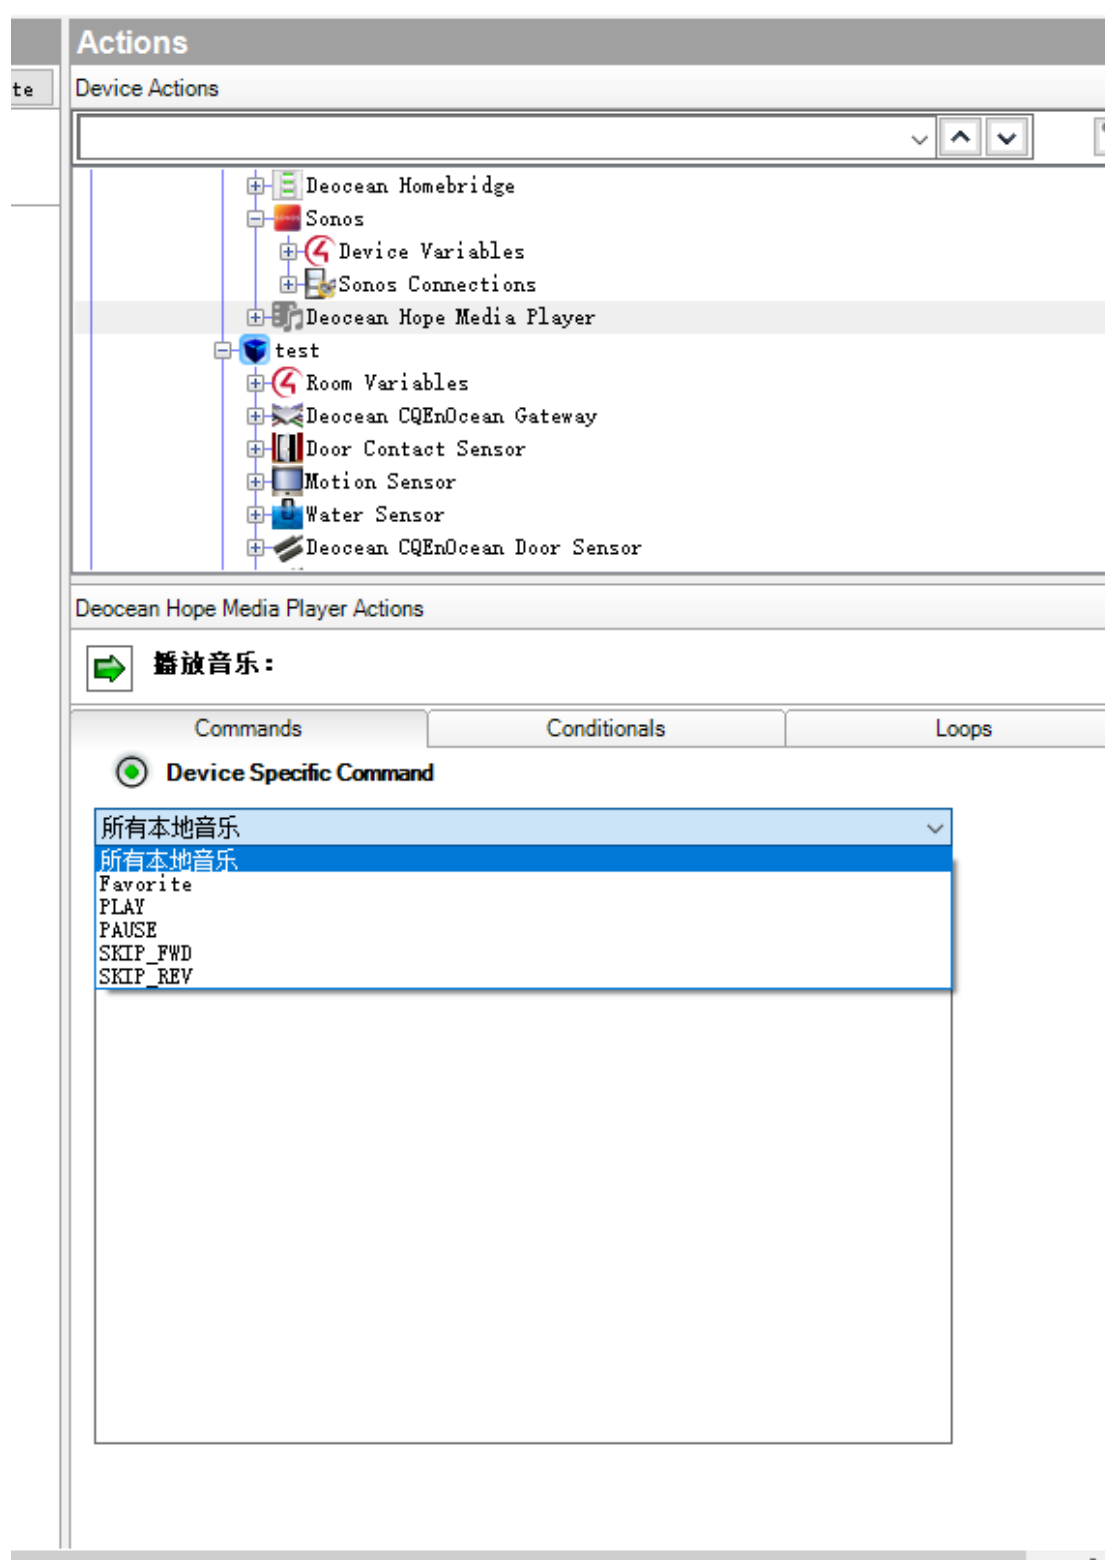

如选择播放音乐，歌曲会刷新在列表中，如没有歌曲请确定播放器中有歌曲，确认后请重复网络连接方法动作。

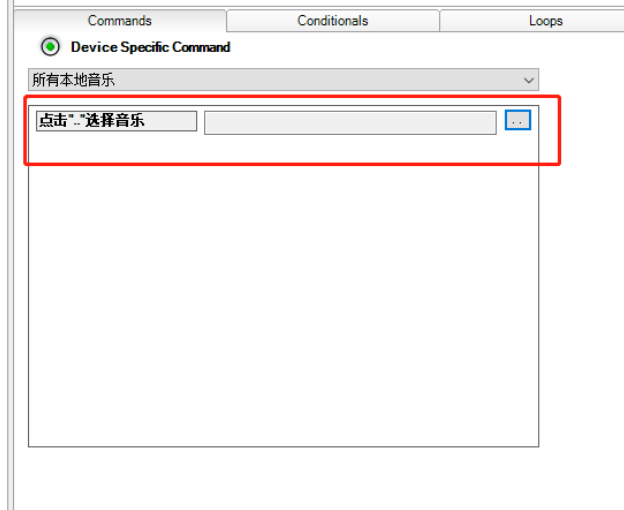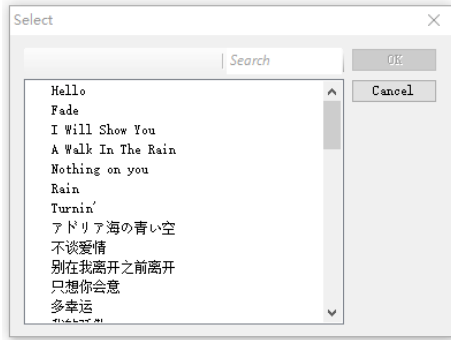

音量编程:

# Actions

Device Actions

- Deocean IRACC Thermostat
- media
  - Room Variables
  - Deocean Control@ Switch
  - 向往
  - Device Variables
  - Hope Connections
- Variables
- Programming Control
- 4Store
- Advanced Lighting
- Media Scenes

Hope Connections Actions

media->Hope Connections Disconnect Audio Output

Commands

Conditionals

Loops

Output

Audio Output

Input



Disconnect

Audio/Video

Volume

Start

Stop

Pulse



Set 0

Bass Settings

Start

Stop

Pulse



Set 0

Treble Settings

Start

Stop

Pulse



Set 0

Balance Settings

Start

Stop

Pulse



Set 0

Loudness Settings

Toggle



Set



万物互联 全面兼容



Better Together



点击 识别二维码  
关注 德能森智能

地址：城南富森美家居 1 号馆 7 楼 7001

电话：400-8073-400

网址：<http://www.deocean.cn>